


Technical Data

Product Description

Practically any combination of field-installed materials can be pre-installed in VMS Pre-fabricated Panels. Available insulation materials include Mineral Wool (4-10-LB Density) or Fiberglass Board (2.5-LB Density) in 2" thru 6" assembled thicknesses. Panel widths vary with selected laggings but typically provide 36" or 44" wide coverage. Any available lagging material may be selected. Backing layer is available in various forms and types of metals (including 2 x 2 welded-wire mesh as illustrated below).

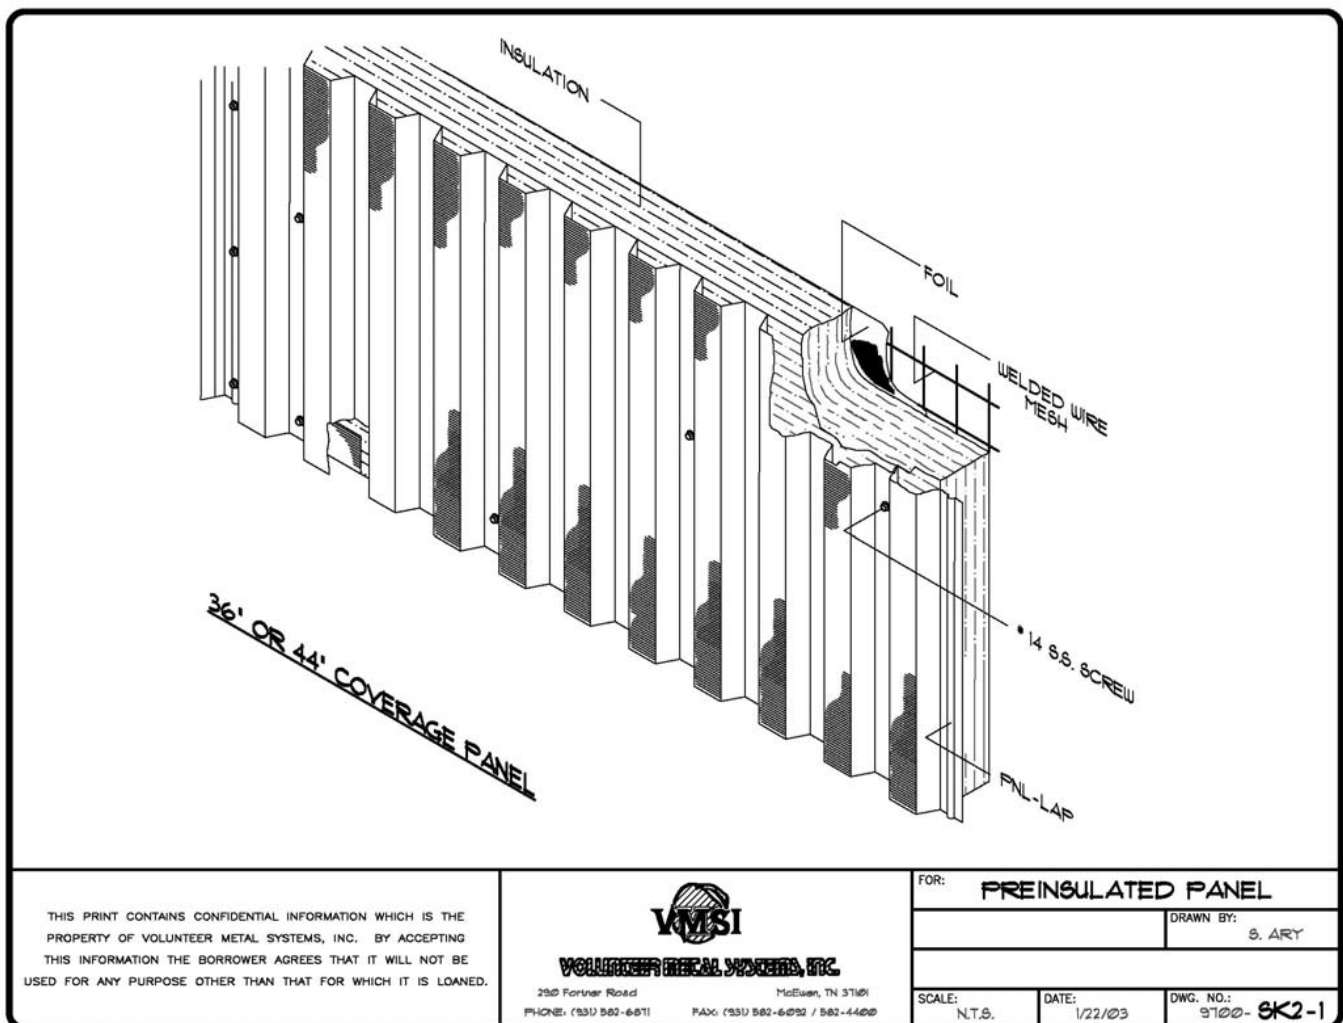

Note: Panel assemblies may include different products or additional components not illustrated above, such as loaded-vinyl sheets for sound deadening applications. Contact VMS for more information.

Corporate Headquarters

290 Fortner Rd. / McEwen, TN 37101
 Phone: (931) 582-6871 Fax: (931) 582-6092